




DC TO DC LED DRIVER BOOST01 SERIES

P/N: BOOST01 SERIES

Feature


- Operating Temperature Range: 10°C ~ 65 °C
- Storage Temperature Range: 25 °C ~ 85 °C

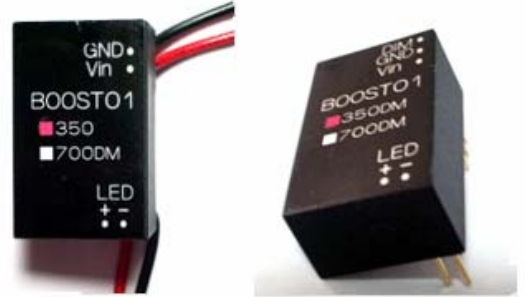

Electrical Specifications @ 25°C							
Part Number	DC input Voltage (V)		Output(LED)			Eff. (% Max)	Power (W Max)
			Voltage(V)		Current(mA)		
	(Min)	(Max)	(Min)	(Max)	(Typ)		
BOOST01-350	7	24	1.25*Vin	2*Vin	350±7.5%	92	16
BOOST01-350DM	7	24	1.25*Vin	2*Vin	350±7.5%	92	16

Mechanical

BOOST01-350

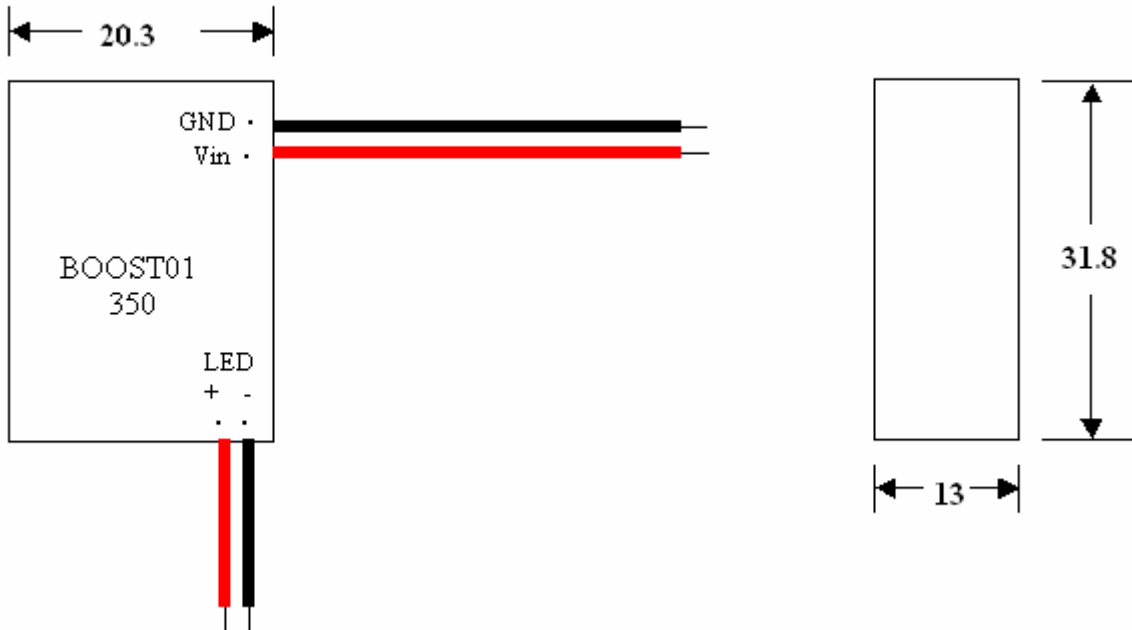


Tel:+86-20-81628973	Fax:+86-20-81628967
E-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn



DC TO DC LED DRIVER BOOST01 SERIES P/N: BOOST01 SERIES

BOOST01-350DM (BOTTOM VIEW)

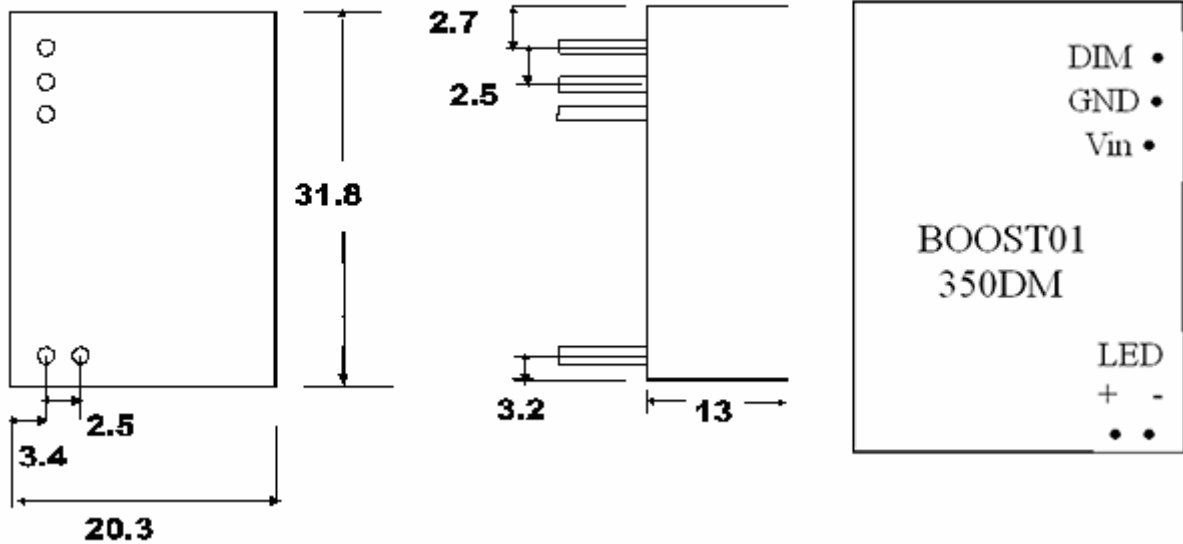

Units: mm.

Tolerance: ± 0.25 unless specified.

NOTE:

Datasheet Change History:

V0	2007/Sep.	Datasheet Set Up

Tel:+86-20-81628973	Fax:+86-20-81628967
E-mail:sales@ceetus.com.cn	Website:www.ceetus.com.cn